

Installation Guide for Tsukayu Touring Trunk and Audio Tour Pack for Metric

1. Install the hard saddlebags, if any. (Please refer to installation guide of hard saddlebags which can be downloaded from www.tsukayu.com)
2. Remove the hard saddlebags, then reinstall again with the trunk brackets located between the fender struts and the brackets of the hard saddlebags (Fig.1). Adjust the trunk brackets until the rear part of the two brackets are positioned horizontally, and then tighten the mounting bolts (Fig.2).
3. Place the trunk on the brackets; adjust the position of the trunk to the best position. Check the clearance between the trunk and the opening of the hard saddlebags.
4. Put painters tape on the estimated area to be drilled, copy the outline of the rear part of brackets to the bottom of the trunk (Fig.4.)
5. Put the trunk on protective material, upside down the trunk. Mark the drilling points using the outline pattern you drawn in step 4, the first hole is 2 inches from the end of brackets, the second hole is 3 inches from the end and so on, and there are 4 holes on each bracket (Fig.5).
6. Drill the marked drilling points with 6mm drill bit, then put the trunk back on the brackets, install the trunk with the bolts and washers provided (Fig.6)
7. Tighten all the bolts and test carefully. Finish.



Fig.1



Fig.2



Fig.3



Fig.4

Thank you for choosing Tsukayu products!



Fig.7



Fig.6

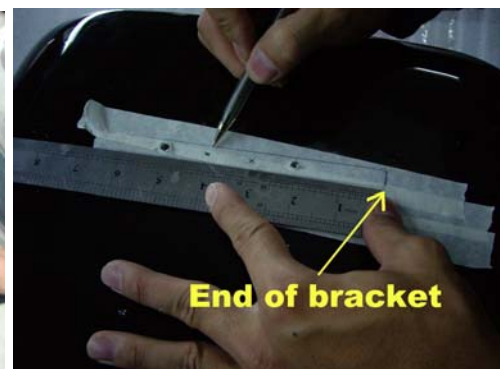


Fig.5